CORONA STEEL

INDUSTRY PVT LTD

INDUSTRIAL STEEL PRODUCTS

BUILT FOR YOUR REQUIREMENT.

PRODUCT CATALOGUE

2026

FROM SPECIFICATION TO SUPPLY.

01

Founded in 1955. Corona Steel Industry Pvt Ltd is an engineering-led manufacturer and global supply partner for fabricated steel components and systems. We work with customers across concrete and construction, fencing, vineyards and orchards, scaffolding, poleline, shelving, plumbing, railway, defence, solar and general engineering.

02

From an initial drawing, sample or requirement. Corona manages the process through engineering, tooling, production, quality control, export packaging and international logistics. Our integrated manufacturing capabilities include die tooling, roll forming, cutting, forging, machining, laboratory testing and protective coating.

03

The result is straightforward. Products made to the required specification, supplied at scale, and delivered reliably to your warehouse.

Since 1955

Established manufacturing heritage

Integrated capabilities

Tooling, forming, machining, testing and coating

Global delivery

Export packaging and logistics to the customer's warehouse

OUR PRODUCT LINES

01
CONCRETE & CONSTRUCTION 04
Stakes, pins, tie rods, bars, road forms, bolts, washers and site accessories.

02
VINEYARD & ORCHARD TRELLISING 09
Posts, stakes, anchors, components, and trellising systems.

03
SCAFFOLDING & SHORING 14
Jacks, planks, cuplock systems, props, and trench struts.

04
POLE-LINE HARDWARE 17
Machine, hex, carriage and arming bolts, spool and lag bolts, washers, ground rods, anchors and nuts.

05
COLD ROLL-FORMED PROFILES 21
C & Z purlins, strut channels, sag rods and related accessories.

06
FABRICATED PRODUCTS 24
Fabricated handrails, block paviour units, rebar carport saddles, axle stands, turnbuckle form aligners and custom steel components.

07
FENCING SYSTEMS 27
Palisade fencing, fence posts, barbed-wire arms, tension rods, gate drop rods, truss rods, fittings and custom-fabricated components.

08
PIPE SUPPORT SYSTEMS 31
Pipe clamps, threaded rods and bars, flange collars, sump receivers, and custom support components.

09
SOLAR POWER COMPONENTS 33
Ground mountings, slotted, solid and punched angles, C & Z purlins, and custom-fabricated components.

10
STEELS –
Steel grades, sections, and custom material requirements.

+ NEED A CUSTOM CONFIGURATION?
Send a drawing or application requirement for a production review.

CONCRETE & CONSTRUCTION

STEEL COMPONENTS FOR FORMWORK, REINFORCEMENT, ANCHORING, AND SITE INFRASTRUCTURE.

Road forms, tie rods, anchor bolts, stakes, dowel bars, binding wire and custom-fabricated components.

CONCRETE & CONSTRUCTION ACCESSORIES

STAKES & PINS

ROUND STAKES

	US	EURO
DIAMETER	3/4, 7/8, 1 in	18, 20, 25 mm
LENGTH	12-56 in	300-1400 mm
FINISH	Plain, coated	
STEEL	Grade 60 and above; tensile strength 60,000 psi and above	

FLAT STAKES / "C" MOUTH STAKES

	US	EURO
SIZE	1-1/2 x 3/8 in	35 x 9 mm
LENGTH	12-56 in	300-1400 mm
FINISH	Plain, coated	
STEEL	Grade 60 and above; tensile strength 60,000 psi and above	

REBAR STAKES

	US	EURO
DIAMETER	5/8-1 in	16-25 mm
LENGTH	16-56 in	300-1400 mm
FINISH	Plain, painted, galvanized, powder coated	
STEEL	C1008-C1040	

SQUARE STAKES

	US	EURO
SIZE	5/8, 3/4 in	16, 18 mm
LENGTH	12-56 in	300-1400 mm
FINISH	Plain, coated	
STEEL	Grade 60 and above; tensile strength 60,000 psi and above	

CONCRETE & CONSTRUCTION ACCESSORIES

FORMWORK & REINFORCEMENT

FORMWORK PINS

	US	EURO
DIAMETER	5/8-1 in	16-25 mm
LENGTH	12-56 in	300-1400 mm
FINISH	Plain, painted, galvanized, powder coated	
STEEL	C1008-C1040	

ANCHOR BOLTS

	US	EURO
DIAMETER	1/4-1 in	M6-M25
LENGTH	6-60 in	150-1500 mm
FINISH	Plain, zinc plated, hot dip galvanized	

PLATE WASHERS

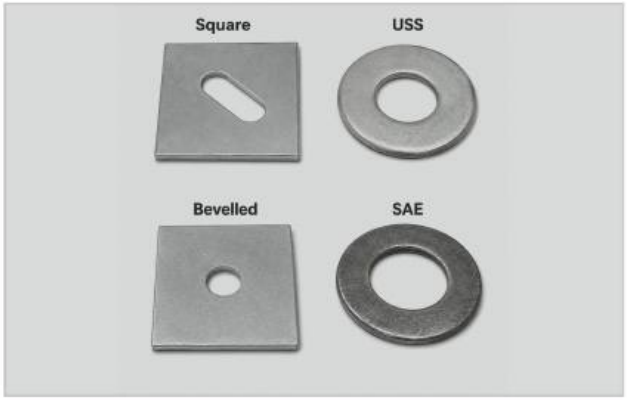

	US	EURO
FINISH	Black, zinc plated, hot dip galvanized	

CUT REBAR

	US	EURO
DIAMETER	3/8-1 in	10-25 mm
LENGTH	1-12 ft	300-3600 mm
FINISH	Plain, zinc plated	

CONCRETE & CONSTRUCTION ACCESSORIES

BARS & RODS

THREADED RODS

	US	EURO
DIAMETER	1/4-2 1/2 in	M6-M60
LENGTH	3-20 ft	1-6 m
THREAD	UNC, BSW, DIN	
THREAD TYPE	'V', coil, square acme	
SPECS	ASTM A307 / DIN 975, stainless steel, 87	
FINISH	Plain, zinc plated, hot dip galvanized	

CUT BARS / DOWEL BARS

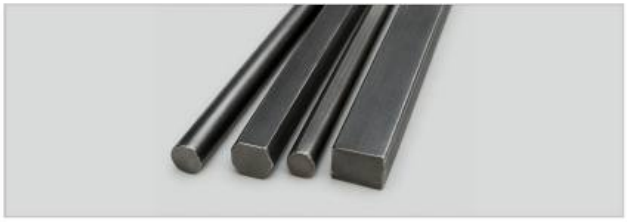

	US	EURO
DIAMETER (ROUND)	1/4-1 in	6-25 mm
SIZE (SQUARE)	5/8, 3/4, 7/8 in	16, 18, 20 mm
LENGTH	1-20 ft	100 mm-6 m
FINISH	Plain, painted, galvanized, powder coated	
STEEL	C1008-C1040	

TIE RODS (DOUBLE ENDED)

	US	EURO
DIAMETER	1/2-2 1/2 in	M12-M60
LENGTH	3-20 ft	1-6 m
THREAD	UNC, BSW, DIN	
THREAD TYPE	'V', coil	
SPECS	ASTM A307 / DIN 975, stainless steel, 87	
FINISH	Plain, zinc plated, hot dip galvanized	
OPTION	Available on round, TMT, rebars	

CONCRETE & CONSTRUCTION ACCESSORIES

SITE ACCESSORIES

TIE ROD NUTS

	US	EURO
DIAMETER	1/2-3/4 in	M12-M20
LENGTH	3-20 ft	1-6 m
THREAD	Dywidag	
FINISH	Plain	

ROAD FORMS

	US	EURO
DIAMETER	4, 6, 8, 10, 12 in	100, 150, 200, 250, 300 mm
LENGTH	10 ft	3 m
FINISH	Plain	

ROAD FORM PINS

	US	EURO
DIAMETER	1/2-1 in	12-25 mm
LENGTH	12-56 in	300-1400 mm
FINISH	Plain, painted	

WIRE

	US	EURO
SIZE	16 Ga	–
FINISH	Black annealed wire	

VINEYARD & ORCHARD TRELLISING

STEEL COMPONENTS FOR VINEYARD, ORCHARD AND CROP-SUPPORT SYSTEMS.

Vineyard posts, orchard posts, stakes, wire supports, trellising accessories and custom-formed components.

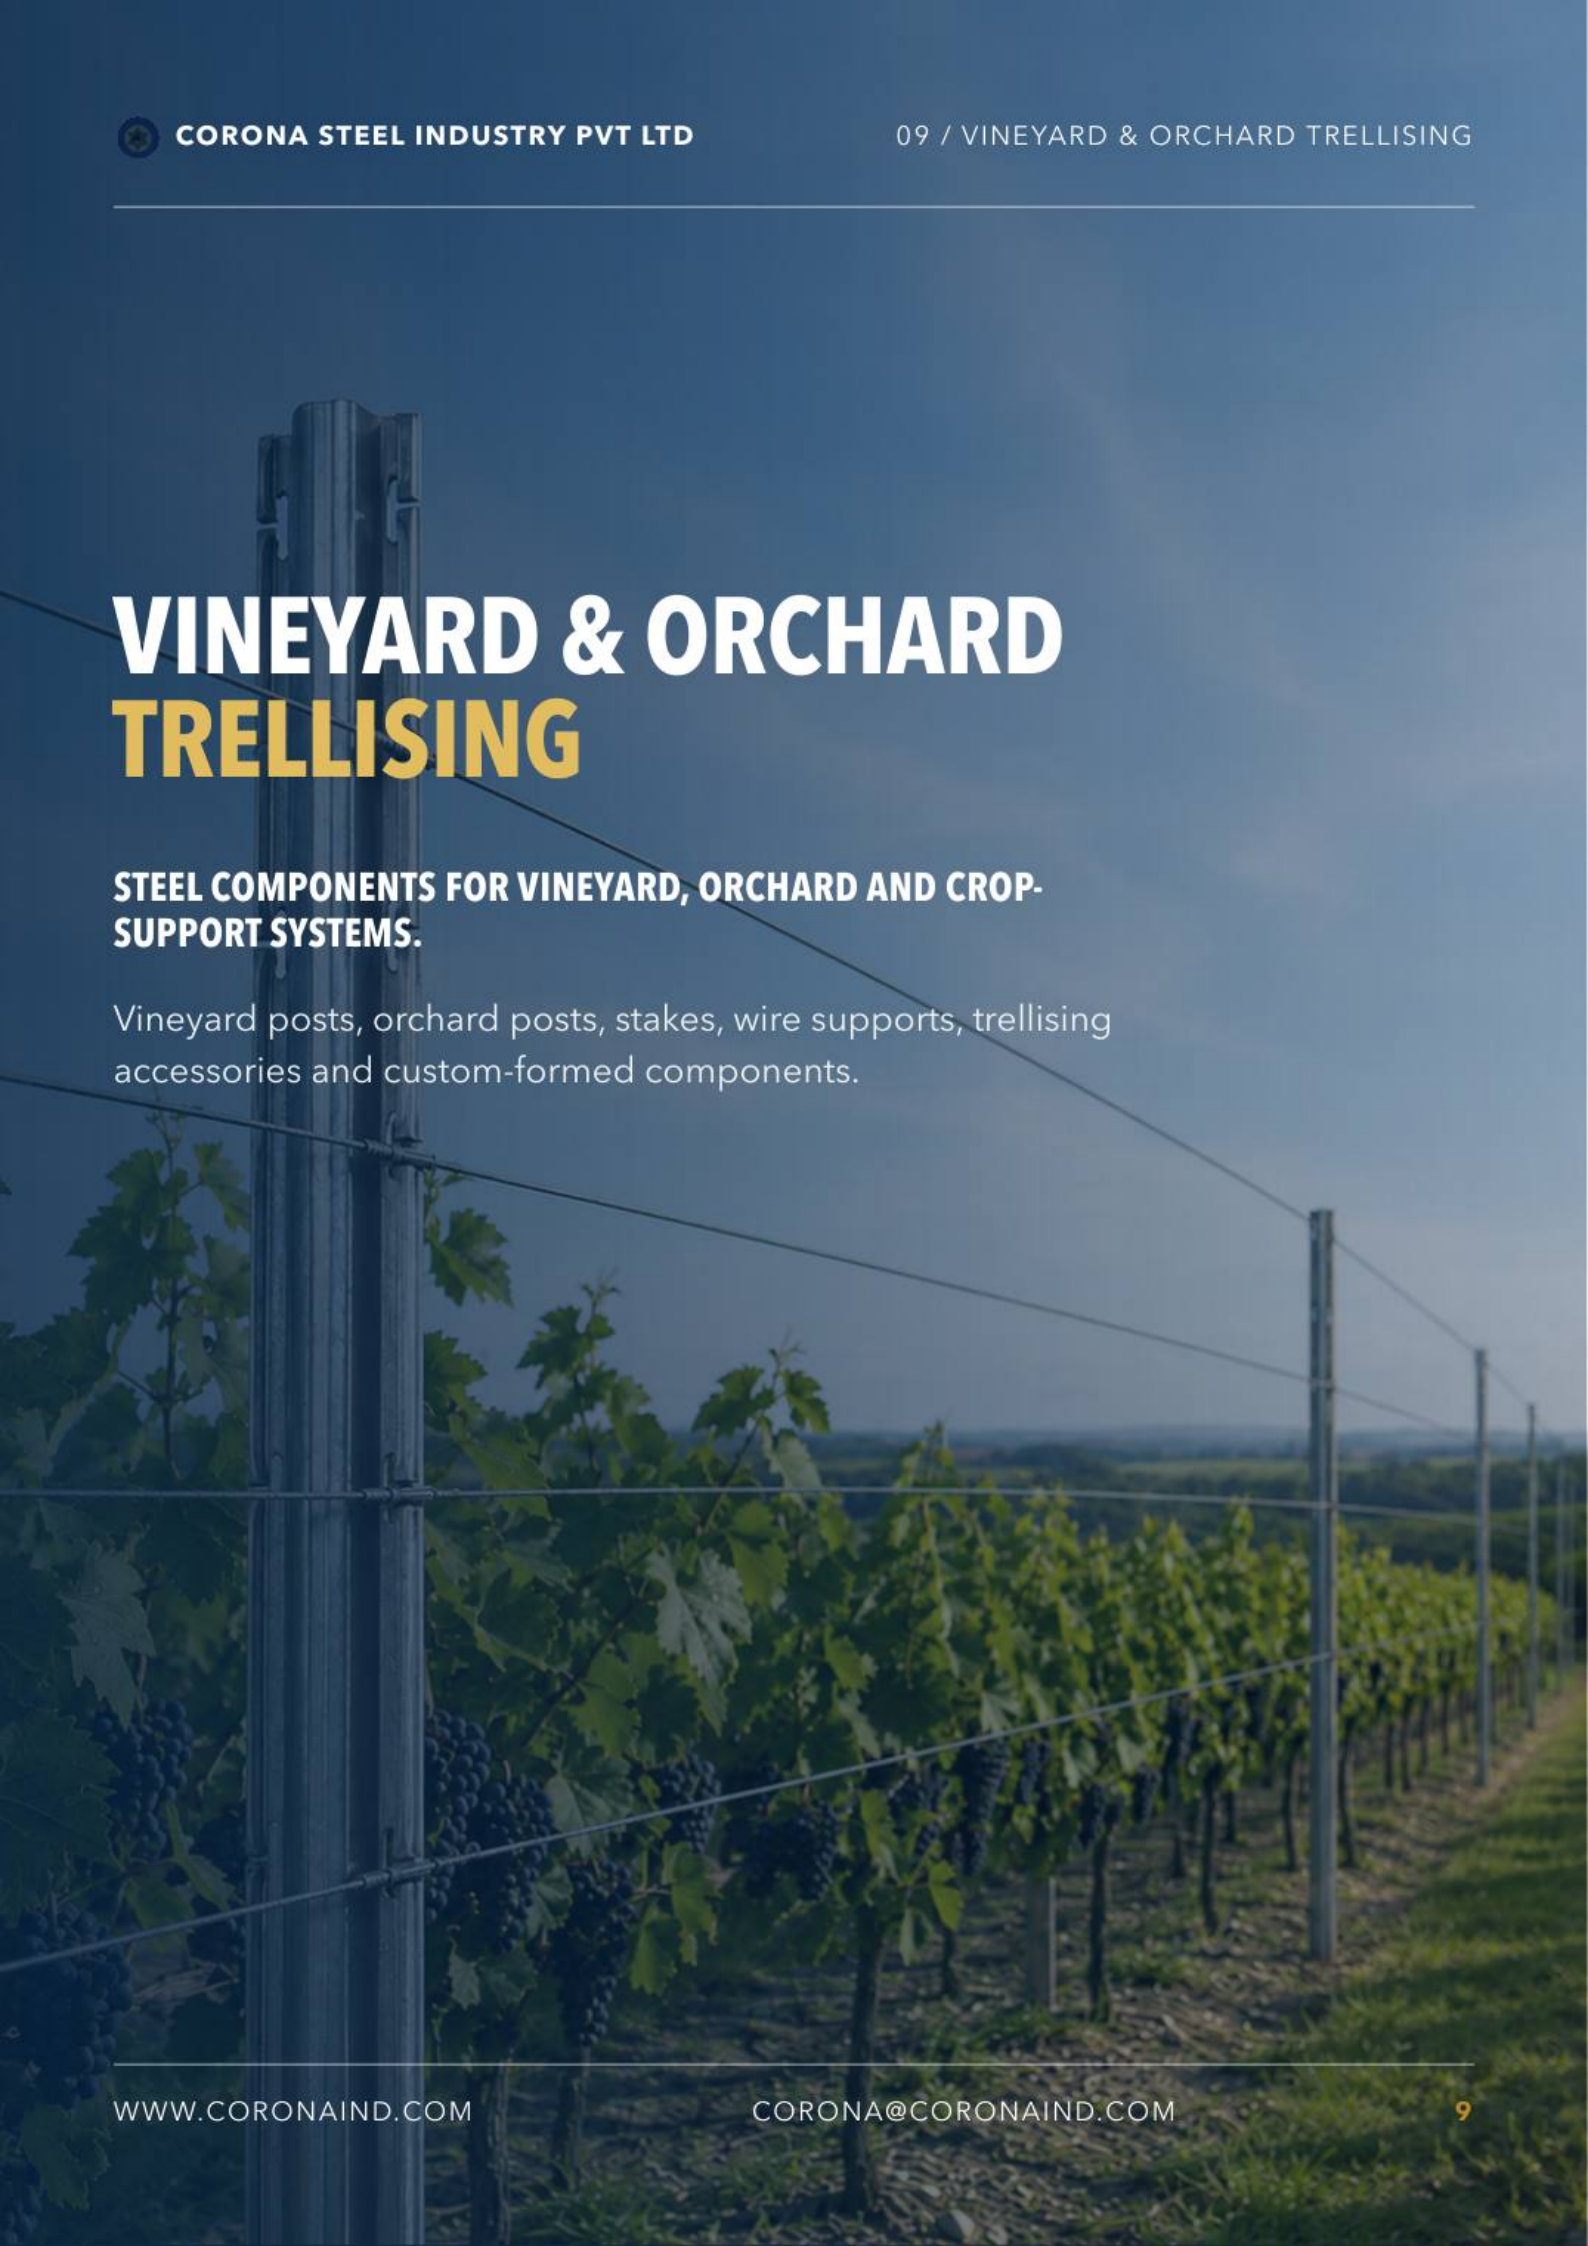

SYSTEM CONFIGURATIONS

TRELLISING SYSTEMS

Steel components configured around the crop, training method and field conditions.

Corona manufactures the posts, stakes, crossarms and wire-support components used to assemble vineyard, orchard and crop-support systems. Components can be produced to customer drawings, including the required profile, dimensions, hole pattern, finish and packing specification.

01

VERTICAL TRELLISING

Single-plane systems designed to support upright shoot growth and organised wire placement.

TYPICAL CONFIGURATIONS

VSP · Vertical trellis · Single-curtain systems

02

CROSSARM TRELLISING

Wider configurations that position wires across formed or fabricated steel crossarms.

TYPICAL CONFIGURATIONS

T-trellis · U-trellis · Y-trellis · Lyre · Double-curtain systems

03

ORCHARD & CROP SUPPORT

Post-and-wire structures used to support trained fruit trees, vines and other cultivated crops.

TYPICAL APPLICATIONS

Table grapes · Apples · Berries · Pomegranates · Other trained crops

SYSTEM COMPONENTS

End posts · Line posts · Grape stakes · Crossarms · Wire supports · Bracing components · Custom-formed profiles

VINEYARD & ORCHARD TRELLISING

POSTS & TRELLISING

ROLLED EDGE VERTICAL LINE POST

	US	EURO
THICKNESS	12 G, 13 G, 14 G	2.5, 2.3, 2.0 mm
LENGTH	7-18 ft	2-6 m
FINISH	Plain, zinc plated, hot dip galvanized	

FLAT-EDGE VERTICAL LINE POST

	US	EURO
THICKNESS	12 G, 13 G, 14 G	2.5, 2.3, 2.0 mm
LENGTH	7-18 ft	2-6 m
FINISH	Plain, zinc plated, hot dip galvanized	

CROSS ARMS

	US	EURO
THICKNESS	12 G, 13 G, 14 G	2.5, 2.3, 2.0 mm
LENGTH	6-36 in	150-900 mm
FINISH	Plain, zinc plated	

VINEYARD & ORCHARD TRELLISING

STAKES & ACCESSORIES

GRAPE STAKES

	US	EURO
SIZE	18 Ga-12 Ga	1.2 mm-2 mm
LENGTH	2-6 ft	1-2 m
FINISH	Plain	

EARTH ANCHOR / AUGER (STRAIGHT / SPIRAL)

	US	EURO
ROD DIAMETER	1/2-1 in	12-25 mm
HELIX DIAMETER	4-10 in	100-250 mm
HELIX THICKNESS	8 G and above	4 mm and above
LENGTH	12 in and above	300 mm and above
FINISH	Painted, powder coated, hot dip galvanized	

V #3 POSTS

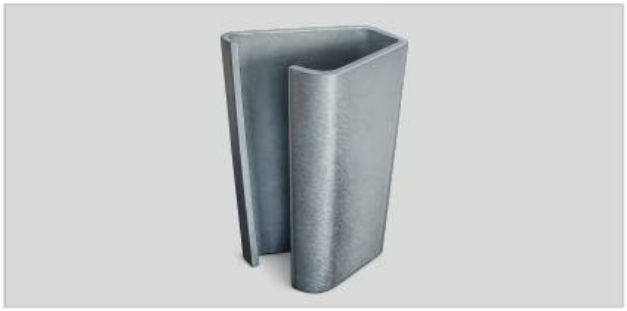

	US	EURO
FINISH	Plain, hot dip galvanized	

PENCIL ROD

	US	EURO
DIAMETER	1/4-1 in	6-24 mm
LENGTH	3-6 ft	1-2 m
FINISH	Plain, zinc plated, hot dip galvanized	

VINEYARD & ORCHARD TRELLISING

TRELLISING ACCESSORIES

CUT REBAR

	US	EURO
DIAMETER	3/8-1 in	10-25 mm
LENGTH	1-12 ft	300-3600 mm

U BOLT

	US	EURO
DIAMETER	1/4 in	6 mm
FINISH	Zinc plated	

T POST CAP

	US	EURO
FINISH	Plain, hot dip galvanized	

STOP PLATE

	US	EURO
FINISH	Plain, hot dip galvanized	

SCAFFOLDING & SHORING

STEEL COMPONENTS FOR TEMPORARY ACCESS, STRUCTURAL SUPPORT AND CONSTRUCTION SYSTEMS.

Screw jacks, steel planks, cuplock components, props, trench struts and custom-fabricated components.

SCAFFOLDING & SHORING

JACKS, PLANKS & SYSTEMS

SCREW JACK WITH BASE PLATE & WING NUT

	US	EURO
DIAMETER	1-1/4, 1-1/2 in (N.B.)	33.7, 38.1 mm (O.D.)
LENGTH	24-36 in	600-900 mm
OPTION	Hollow, solid	
FINISH	Zinc plated, hot dip galvanized, painted	

HI-LOAD SCREW JACK WITH WING NUT

	US	EURO
DIAMETER	1-1/4, 1-1/2 in (N.B.)	48.3, 60.3 mm (O.D.)
LENGTH	30-120 in	760 mm-3 m
OPTION	Heavier sizes also available	
FINISH	Zinc plated, hot dip galvanized, painted	

PLANKS

	US	EURO
THICKNESS	12 G-10 G	2, 3 mm
LENGTH	3-12 ft	1-4 m
FINISH	Zinc plated, hot dip galvanized	

CUPLOCK SYSTEM

	US	EURO
DIAMETER	2 in (N.B.)	48.3 mm (O.D.)
LENGTH	3-12 ft	1-4 m
ASSEMBLY	Vertical + horizontal	
FINISH	Plain, zinc plated	

SCAFFOLDING & SHORING

PROPS & TRENCH STRUTS

PROPS

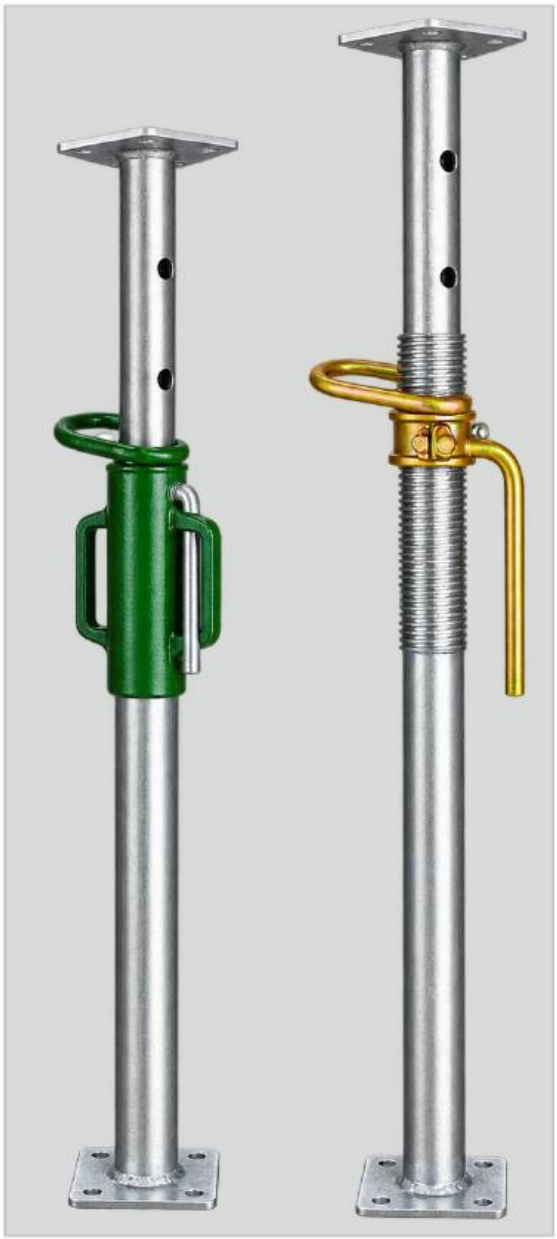

G PIN

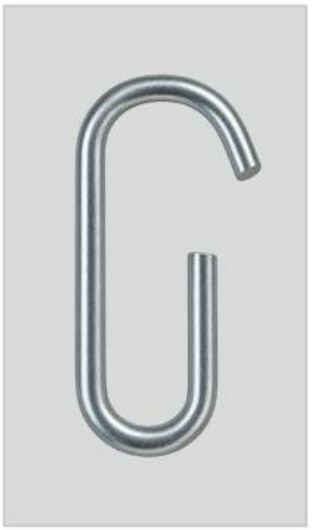

PROP NUT

THREADED TUBE

TRENCH STRUTS

COMMON SPECIFICATIONS

SIZE	#0	#1	#2	#3	#4
FINISH	Zinc plated, hot dip galvanized, painted				

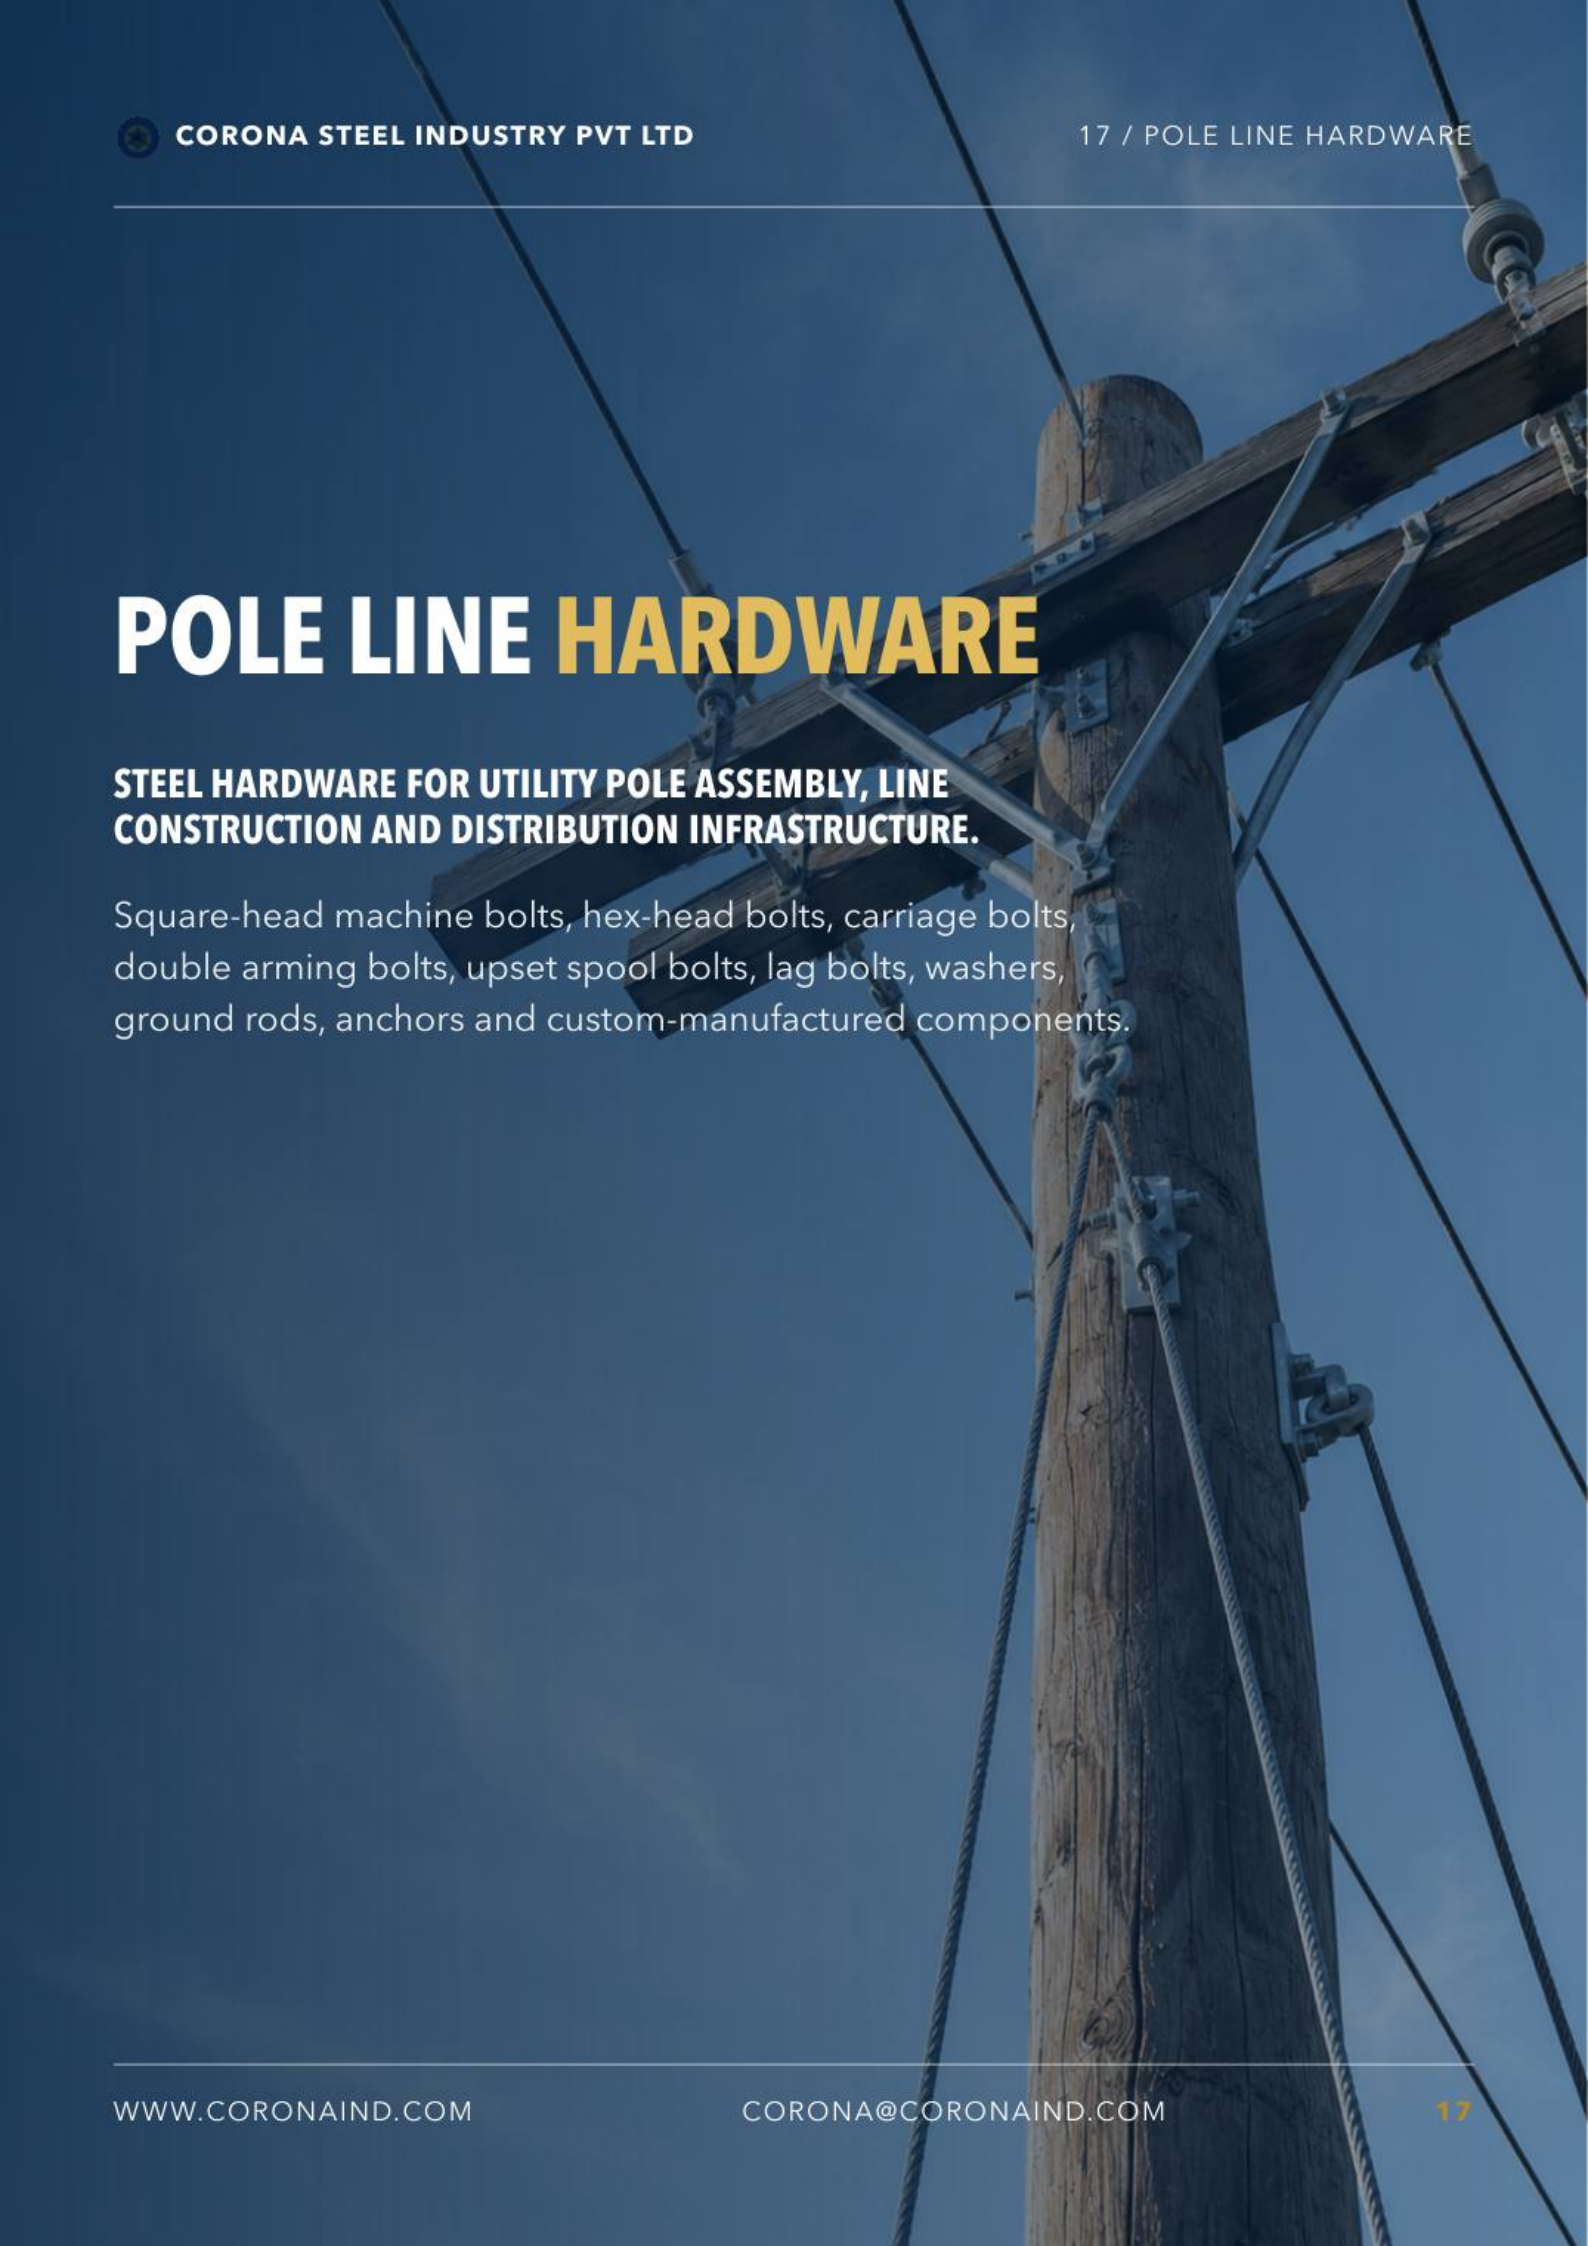

POLE LINE HARDWARE

STEEL HARDWARE FOR UTILITY POLE ASSEMBLY, LINE CONSTRUCTION AND DISTRIBUTION INFRASTRUCTURE.

Square-head machine bolts, hex-head bolts, carriage bolts, double arming bolts, upset spool bolts, lag bolts, washers, ground rods, anchors and custom-manufactured components.

POLE LINE HARDWARE

BOLTS & ARMING HARDWARE

MACHINE / SQUARE HEADED BOLT

	US	EURO
DIAMETER	3/8-1 1/4 in	M10-M32
LENGTH	10-40 in	250-1000 mm
THREAD LENGTH	Up to 6 in	Up to 150 mm
SPECS	Conforming to ANSI C135.1 or equivalent	
FINISH	Hot dip galvanized to ASTM A153	

HEX HEADED BOLT

	US	EURO
DIAMETER	1/4-1 1/4 in	M6-M32
LENGTH	10-40 in	250-1000 mm
THREAD LENGTH	Up to 6 in	Up to 150 mm
SPECS	Conforming to BS 4190, BS 3692 or equivalent	
FINISH	Hot dip galvanized to BS 729; Grade 4.6, 5.6, 8.8	

CARRIAGE BOLT

	US	EURO
DIAMETER	3/8-5/8 in	M10-M16
LENGTH	1-7 in	25-180 mm
THREAD LENGTH	Up to 1 1/4 in	Up to 32 mm
SPECS	Conforming to ANSI C135.1 or equivalent	
FINISH	Hot dip galvanized to ASTM A153	
ASSEMBLY	Bolt + 1 square nut	

DOUBLE ARMING ROD

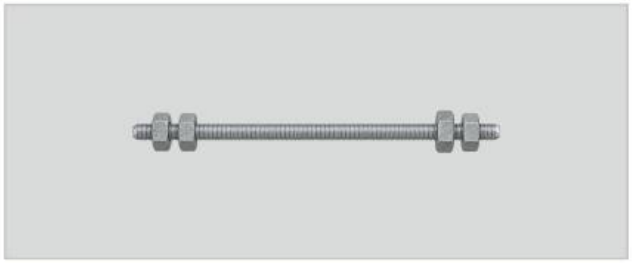

	US	EURO
DIAMETER	5/8-1 1/4 in	M16-M32
LENGTH	10-36 in	25-900 mm
DETAIL	Semi-cone points at both ends	
SPECS	Conforming to ANSI C135.1 or equivalent	
FINISH	Hot dip galvanized to ASTM A153	
ASSEMBLY	Bolt + 4 square nuts / hex nuts	

POLE LINE HARDWARE

BOLTS, WASHERS & GROUND RODS

SPOOL BOLT

	US	EURO
DIAMETER	5/8 in	M16
SHANK LENGTH	8-14 in	200-350 mm
THREAD LENGTH	4-6 1/2 in	100-160 mm
DESCRIPTION	Single / double shoulder	
FINISH	Hot dip galvanized to ASTM A153	
ASSEMBLY	Bolt + 4 square nuts + 2 lock washers + 1 round washer	

LAG BOLT

	US	EURO
DIAMETER	1/4-1 in	M6-M25
LENGTH	2 1/2-6 in	60-150 mm
TYPE	Regular point, Gilmet point, Fetter Drive pilot point	
HEADER	Lag bolts can have either a hexagon or a square head	
FINISH	Hot dip galvanized to ASTM A153	

WASHERS

	US	EURO
FINISH	Hot dip galvanized to ASTM A153 / BS 729	

GROUND ROD

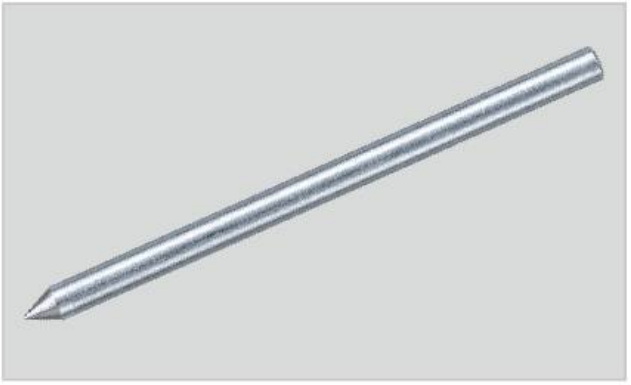

	US	EURO
SIZE	5/8-3/4 in	M16, M20
LENGTH	6-10 ft	2-3 m
FINISH	Hot dip galvanized to ASTM A135.1	

POLE LINE HARDWARE

ANCHORS & NUTS

EARTH ANCHOR / AUGER

	US	EURO
ROD DIAMETER	1/2-1 in	12-25 mm
HELIX DIAMETER	4-10 in	100-250 mm
HELIX THICKNESS	8 G & above	4 mm & above
LENGTH	12 in & above	300 mm & above
FINISH	Painted, powder coated, hot dip galvanized	

SQUARE NUT

	US	EURO
SIZE	3/16-1 1/4 in	–

HEX NUT

	US	EURO
SIZE	3/16-1 1/4 in	–

COLD FORMED PROFILES & SECTIONS

STEEL PROFILES FOR ROOFING, FRAMING, SUPPORT AND INDUSTRIAL CONSTRUCTION SYSTEMS.

C & Z purlins, lipped channels, strut channels, sag rods, guard rail profiles and custom cold-formed sections.

COLD FORMED PROFILES & SECTIONS

PURLINS & SAG RODS

C PURLIN

	US	EURO
HEIGHT (H)	4.5-10 in	120-250 mm
FLANGE (B)	2.35 in	60 mm
LIP (C)	3/4 in	20 mm
THICKNESS (T)	10G-14G	2-3.15 mm
FINISH	Plain, galvanized, red oxide primer	

Z PURLIN

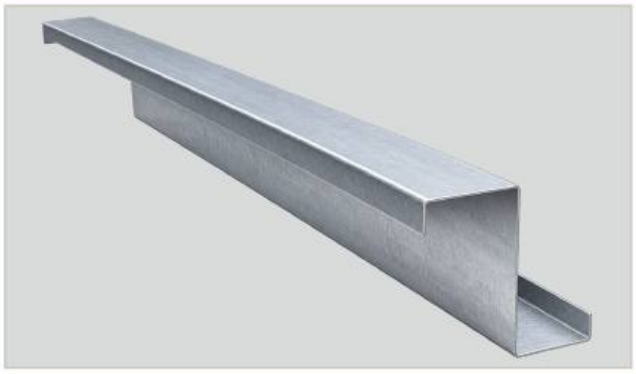

	US	EURO
HEIGHT (H)	4.5-10 in	120-250 mm
FLANGE (B)	2.75 in	70 mm
LIP (C)	3/4 in	20 mm
THICKNESS (T)	10G-14G	2-3.15 mm
FINISH	Plain, galvanized, red oxide primer	

SAG RODS

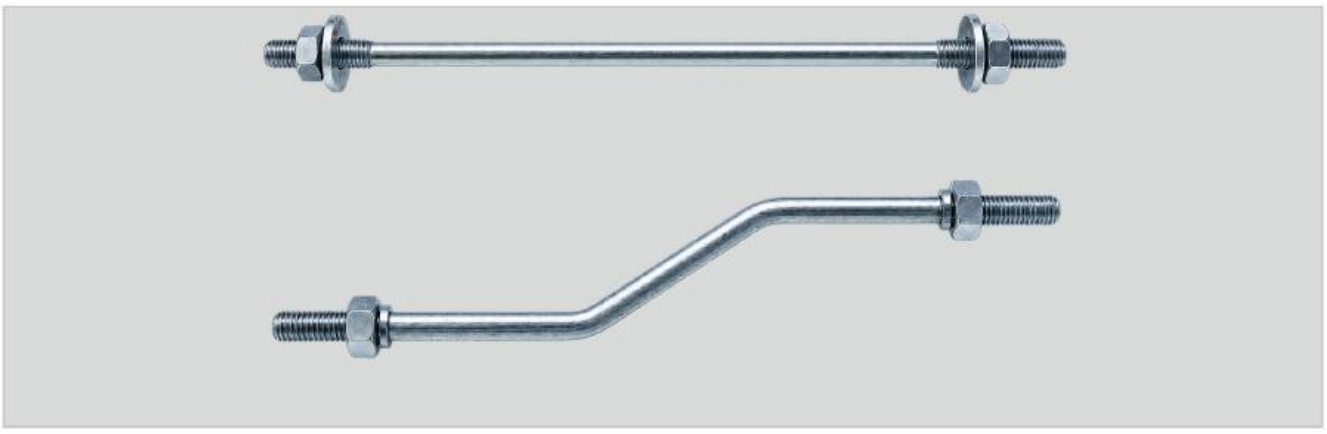

	US	EURO
DIAMETER	5/8 in	16 mm
LENGTH	3-10 ft	900 mm-3 m
FINISH	Plain	
ASSEMBLY	1 rod + 4 nuts + 2 round washers	

COLD FORMED PROFILES & SECTIONS

STRUT CHANNELS & ACCESSORIES

UNIVERSAL STRUT CHANNEL / 'C' STRUT CHANNEL

	US	EURO
DIAMETER	12G 13G 14G	2.5 mm 2.3 mm 2.0 mm
SIZE	13/16" x 1-5/8" 1-5/8" x 1-5/8" 2-7/16" x 1-5/8" 3-1/4" x 1-5/8"	21 mm x 41 mm 41 mm x 41 mm 61 mm x 41 mm 81 mm x 41 mm
FINISH	Plain, Hot Dip Galvanised, Powder Coated Stainless Steel - upon request	

ACCESSORIES

- Spring Nuts / Stud Nuts
- Threaded Rods & Coupler Nuts
- Plate Fittings
- Brackets
- Pipe Clamps & Hangers

FABRICATED PRODUCTS

ENGINEERED STEEL FABRICATIONS FOR CONSTRUCTION, HANDLING AND INDUSTRIAL APPLICATIONS.

Fabricated handrails, block paviour units, axle stands, turnbuckle form aligners and custom steel components built to drawing.

FABRICATED PRODUCTS

FABRICATED PRODUCTS

FABRICATED HAND RAILS

BLOCK PAVIOUR

REBAR CARPORT SADDLE

FABRICATED PRODUCTS

AXLE STAND & TURNBUCKLE ALIGNER

AXLE STAND

TURNBUCKLE FORM ALIGNER

	US	EURO
COIL THREAD	1"	25 mm
OVERALL LENGTH	Min 37" - Max 40"	Min 950 mm - Max 1000 mm
ADJUSTMENT	3"	8 mm
NAIL PLATE FITS (STAKES)	3/4" ; 7/8"	20 mm, 22 mm
FINISH	Painted	

FENCING SYSTEMS

STEEL FENCING SYSTEMS AND COMPONENTS FOR INDUSTRIAL, COMMERCIAL AND INFRASTRUCTURE PERIMETER SECURITY.

Palisade fencing, fence posts, barbed-wire arms, tension bars, gate rods, drop rods, truss rods, fittings and custom-fabricated components.

FENCING

PALISADE FENCE

PALISADE FENCE

Palisade fencing provides a robust steel perimeter system for industrial, commercial and high-security applications. Cold-formed profiled steel pales are arranged vertically and fixed to horizontal steel members, supported by RSJ posts and assembled using fish plates and bolts.

	'D' PALE	'W' PALE
MATERIAL THICKNESS		
	2.0 mm for General Purpose Use	2.0 mm for Light Duty Use
	2.5 mm for Security Use	2.5 mm for General Purpose Use
	3.0 mm for High Security Use	3.0 mm for Security Use
FINISH	Plain, Hot Dip Galvanised & Powder Coated	

ACCESSORIES	
Angle Cross Pale	50 mm x 50 mm x 6 mm
Post (RSJ)	100 mm x 50 mm x 6 mm 110 mm x 80 mm x 6 mm
Fish Plate	170 mm x 30 mm x 5 mm
Bolts	M8 and M12

TRIPLE POINTED

SINGLE POINT

ROUND TOP

NOTCHED ROUND TOP

FLAT TOP

FENCING

FENCING COMPONENTS

BARBED WIRE ARM

	US	EURO
SIZE	14 G x 1-5/8, 2, 2-1/2 in	–
FINISH	Hot Dip Galvanised	

TENSION ROD

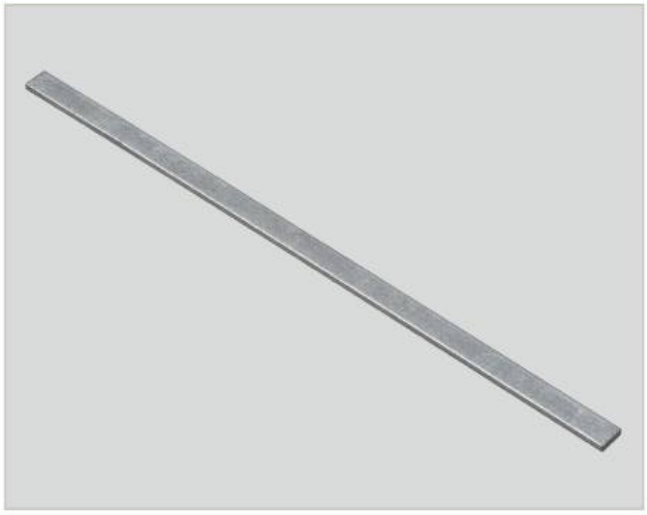

	US	EURO
SIZE	3/16 x 5/8; 3/16 x 3/4; 1/4 x 3/4 in	–
LENGTH	Standard lengths for 3-12 ft	
OPTION	Mini bars and custom sizes available	

GATE DROP ROD

	US	EURO
GATE ROD DIAMETER	5/16 in	–
DROP ROD DIAMETER	1/2 and 5/8 in drawn rounds	–
DROP ROD LENGTH	30 and 36 in nominal, standard L bend	

TRUSS ROD

	US	EURO
SIZE	3/8 and 1/2 in round	–
LENGTH	11, 12, 15 and 20 ft	
ASSEMBLY	Hot dip galvanized hex nut on 12 in of threads at one end	

FENCING

BOLTS & FITTINGS

CARRIAGE BOLT

	US	EURO
SIZE	1/4-1/2 in	M6-M12
LENGTH	1-1/4-12 in	32-300 mm
FINISH	Hot Dip Galvanised	

MACHINE BOLT

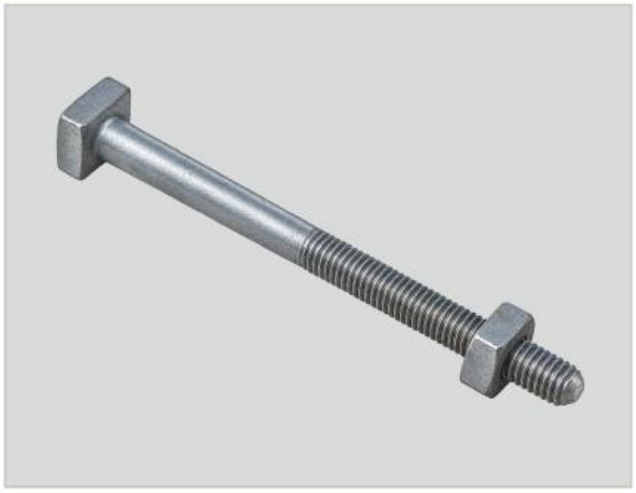

	US	EURO
SIZE	1/4-1/2 in	M6-M12
LENGTH	1-1/4-12 in	32-300 mm
FINISH	Hot Dip Galvanised	

FENCE POST

	US	EURO
SIZE	14 G	2.0 mm
LENGTH	3-6 ft	1-2 m
FINISH	Hot Dip Galvanised	

FENCE FITTINGS

	US	EURO
FINISH	Hot Dip Galvanised, Powder Coated	
OPTION	Various designs of fence fittings available	

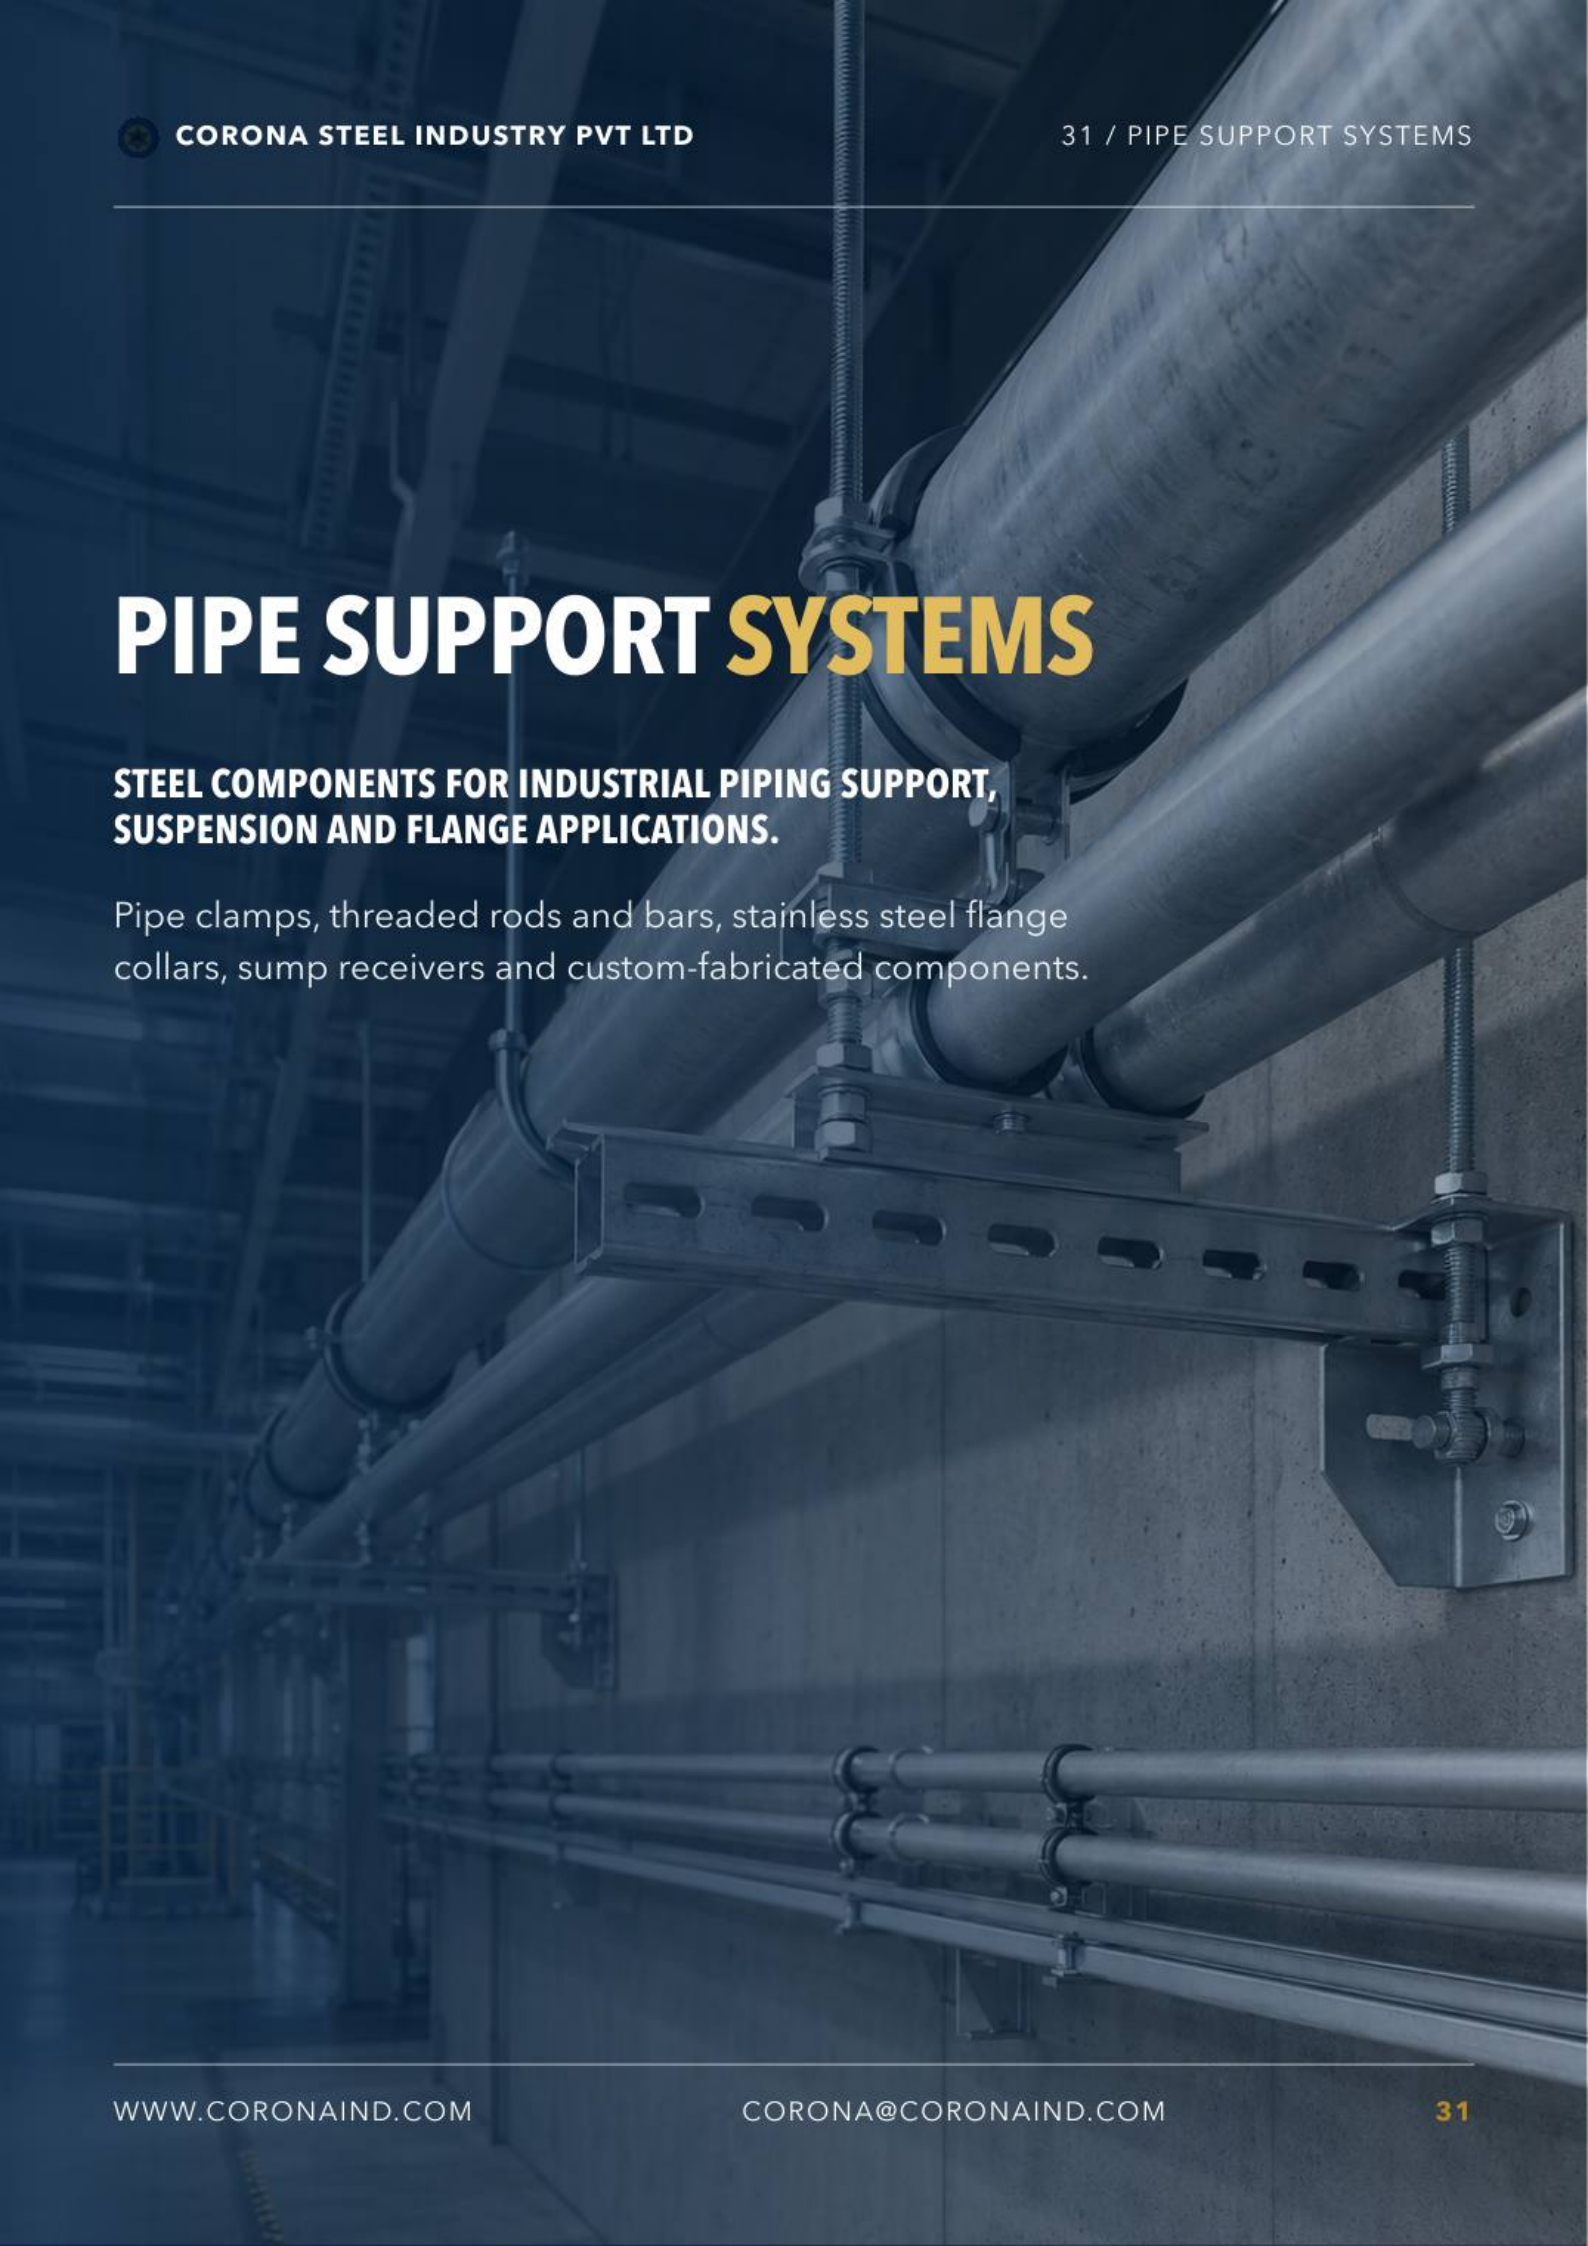

PIPE SUPPORT SYSTEMS

STEEL COMPONENTS FOR INDUSTRIAL PIPING SUPPORT, SUSPENSION AND FLANGE APPLICATIONS.

Pipe clamps, threaded rods and bars, stainless steel flange collars, sump receivers and custom-fabricated components.

PIPE SUPPORT SYSTEMS

PIPE SUPPORT COMPONENTS

PIPE CLAMPS

	US	EURO
NOMINAL PIPE SIZE	1/2" - 30"	15 mm - 750 mm
THICKNESS	0.120" - 0.790"	3 mm - 20 mm
FINISH	Plain, Zinc Plated, Hot Dip Galvanised, Powder Coated	

STAINLESS STEEL COLLARS (FOR FLANGES)

	US	EURO
NOMINAL PIPE SIZE	1/2" - 24"	15 mm - 600 mm
THICKNESS	11G, 12G	2 mm, 3 mm
MATERIAL	Stainless Steel - 304, 304L, 316, 316L	

SUMP RECEIVER (FINISH: ZINC PLATED, POWDER COATED)

THREADED RODS / BARS

	US	EURO
DIAMETER	1/4" - 2-1/2"	M6 - M60
LENGTH	2 ft - 19 ft	1 m - 5.8 m
THREAD	UNC, BSW, DIN	
THREAD TYPE	'V', Coil, Square, Acme, Dywidag	
MATERIAL / GRADE	Carbon Steel, B7, Stainless Steel	
FINISH	Plain, Zinc Plated	
PACKING	Economy: Plastic Tubes Heavy: Paper Tubes / Cones	

SOLAR POWER COMPONENTS

STEEL COMPONENTS FOR GROUND-MOUNTED SOLAR STRUCTURES AND SUPPORT SYSTEMS.

Ground mountings, C & Z purlins, lipped channels, slotted and punched angles, and custom-fabricated components.

SOLAR POWER COMPONENTS

GROUND MOUNTINGS & PURLINS

GROUND MOUNTINGS

	US	EURO
COMPONENTS	Cold Formed Sections & Fabrication	
FINISH	Plain, Painted, Hot Dip Galvanised	

SLOTTED, SOLID, PUNCHED ANGLES

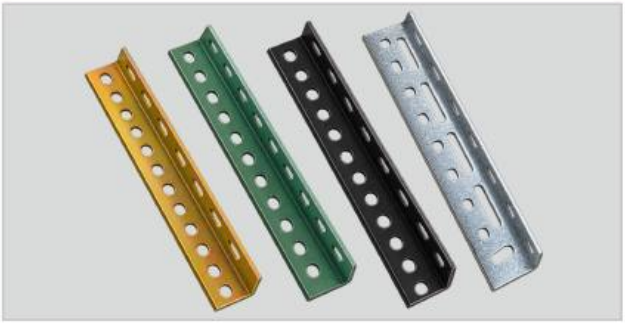

	US	EURO
SIZE	Equal angles 1 x 1 to 4 x 4 in	–
THICKNESS	20Ga-8Ga	–

C PURLIN

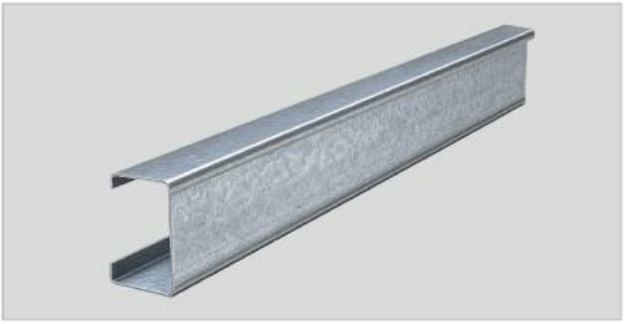

	US	EURO
HEIGHT (H)	4.5-10 in	120-250 mm
FLANGE (B)	2.35 in	60 mm
LIP (C)	3/4 in	20 mm
THICKNESS (T)	10G-14G	2-3.5 mm
FINISH	Plain, Galvanized, Red Oxide Primer	

Z PURLIN

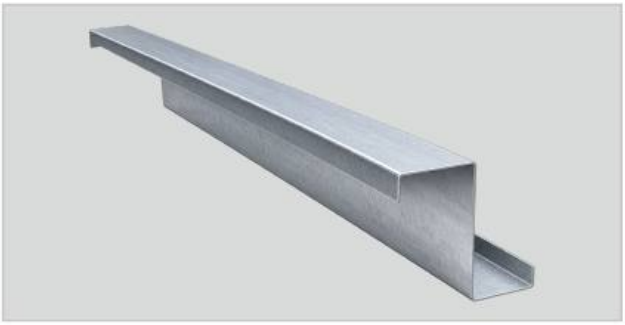

	US	EURO
HEIGHT (H)	4.5-10 in	120-250 mm
FLANGE (B)	2.75 in	70 mm
LIP (C)	3/4 in	20 mm
THICKNESS (T)	10G-14G	2-3.5 mm
FINISH	Plain, Galvanized, Red Oxide Primer	

START WITH A REQUIREMENT.

Send us your drawing, specification or product requirement.

From material and finish to production, quality control, packing and international logistics, Corona manages the process through to delivery.

You specify what you need. We make it and get it to you.

CONTACT CORONA

RFQS · DRAWINGS · PRODUCTION ENQUIRIES

P-34 India Exchange Place
Kolkata 700001, West Bengal
India

PHONE	+91 33 4005 2700
EMAIL	corona@coronaind.com
WEB	www.coronaind.com

SCAN TO CONNECT

CORONA STEEL INDUSTRY PVT LTD

FROM SPECIFICATION TO SUPPLY.

CORONA STEEL

INDUSTRY PVT LTD

FROM SPECIFICATION TO SUPPLY.

We manufacture to your requirements, manage the process, and deliver into your supply chain.

www.coronaind.com